


Product Datasheet

GM Gypsum

## **GM 28 Perimeter Channel**

## GM 28 Perimeter Channel

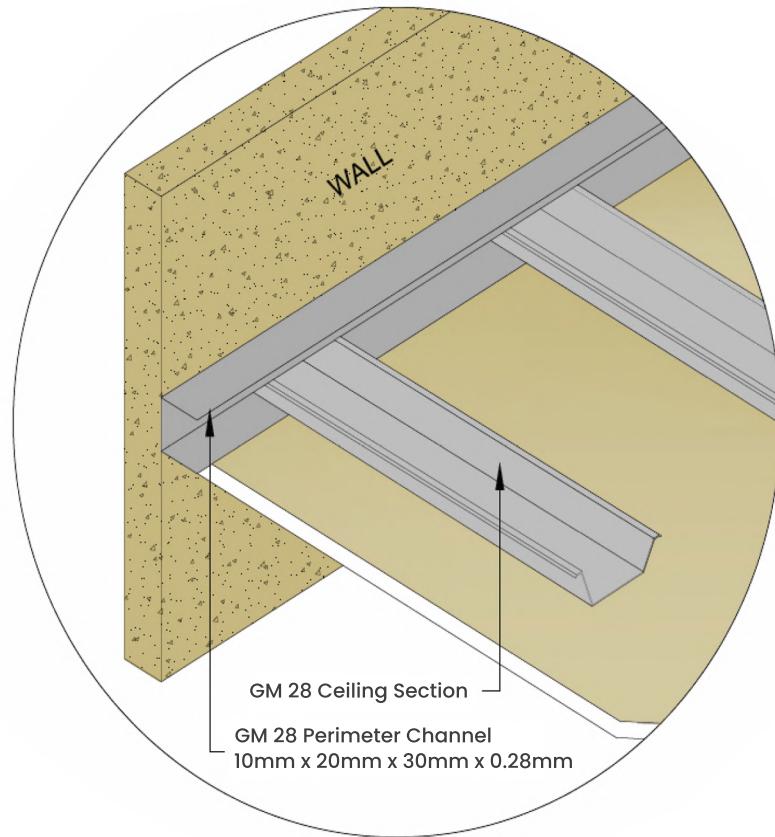


### Description:

GM 28 Perimeter Channel is an integral part of the Gypsum suspended ceiling system. GM 28 Perimeter Channel is used to fix at the periphery of the brick wall/drywall to receive the end of ceiling sections and Intermediate Channel on top. This acts as the frame for the false ceiling.

These are roll-formed on specially designed automatic machines.

### Products properties:

Description	Unit	Range
Flange (A)	mm	10 (+/-0.50)
Flange (B)	mm	20 (+/-0.50)
Web (C)	mm	20mm (+/- 0.50)
Thickness (C)	mm	0.28mm (+/- 0.05)
Standard Length	mm	3660(+/-5)
Yield strength	MPA	Min.185

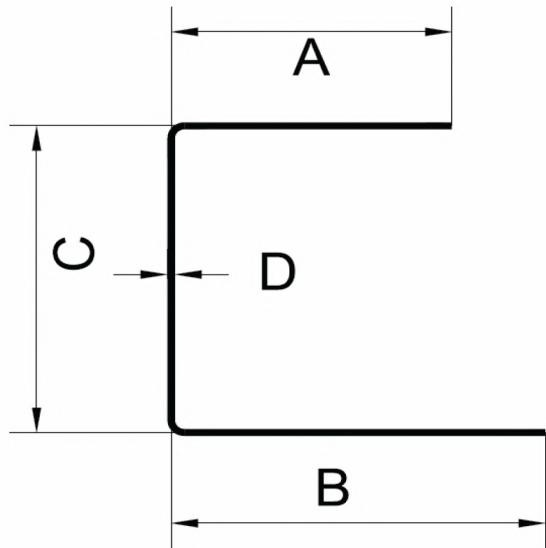**Drawing:****False Ceiling GM 50 Perimeter Channel framing:**

- GM 50 Perimeter Channel is fixed to brick wall / drywall with approved PVC plugs and steel screws at 600mm c/c.

**Safety:**

While handling & cutting of GM 28 Perimeter Channel, please adhere to the safety guidelines & wear the essential PPE.

**RIGHTS OWNED BY  
GYPMAN TECH COMPANY LIMITED**

9/9 @Sathorn building Floor 16 Zone A, Sathorn Tai Rd,  
Yannawa, Sathorn, Bangkok 10120 Thailand